




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 13/15	A1	(11) International Publication Number: WO 99/25284 (43) International Publication Date: 27 May 1999 (27.05.99)
<p>(21) International Application Number: PCT/US97/20792</p> <p>(22) International Filing Date: 13 November 1997 (13.11.97)</p> <p>(71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): WILLMS, Eric, Joachim [DE/DE]; Gartenstrasse 4a, D-65812 Bad Soden (DE). SCHMITT, Achim [DE/DE]; Talstrasse 6A, D-55424 Münster-Sarmsheim (DE). WOSCHNIK, Thomas [DE/DE]; Nobisstrasse 20A, D-53881 Euskirchen (DE). MICCIO, Silvio [DE/DE]; Am Burgweiher 50, D-53123 Bonn (DE). THURNAY, Eva, Susanne [DE/DE]; Frankfurter Strasse 9G, D-76344 Eggenstein-Leopoldshafen (DE). BLANCO, Agustin, Ramos [ES/DE]; Pfaffenweg 12B, D-61440 Oberursel (DE).</p> <p>(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: ABSORBENT ARTICLES WITH MEANS FOR ACHIEVING OR MAINTAINING CONVEXO-CONCAVE BUNCHING

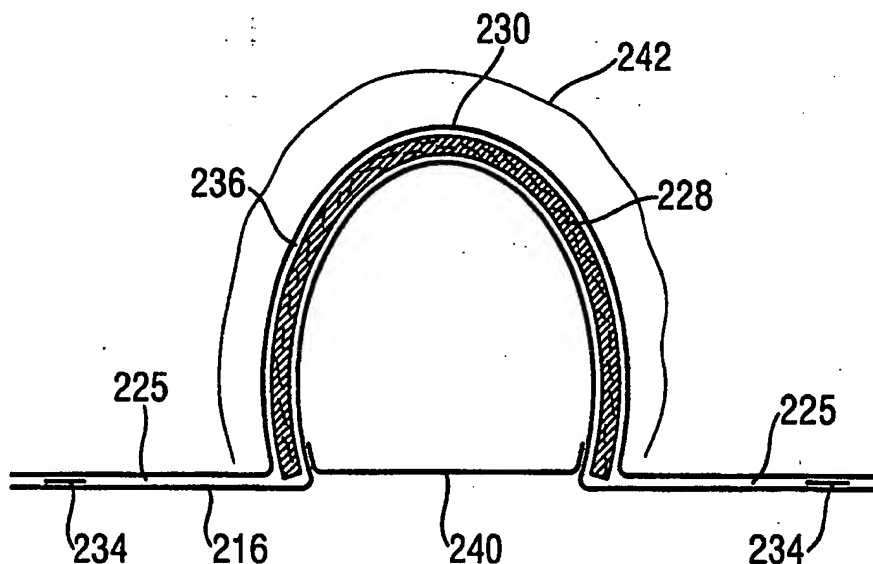

(57) Abstract

The present invention relates to absorbent articles comprising a means to achieve or maintain a convexo-concave shape with an upwardly bulged (i.e. towards the wearer during use) center crotch part, and outwardly bulged parts at the longitudinal ends of the article following the body curvature to surround the waist.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Absorbent Articles
with means for achieving or maintaining
convexo-concave bunching

5

10

15

General field of the invention

The present invention relates to hygienic absorbent articles, in particular to absorbent articles designed for receiving larger amounts of body fluids as urine and / or fecal material, such as adult incontinence articles or baby diapers.

20

Background / Prior art

Absorbent articles for use in hygienic applications are well known in the art. Also, the shaping of such absorbent articles has been discussed in depth, both with regard to contouring of the article (in contrast to e.g. rectangular), but also with regard to three dimensional shape.

25

In particular feminine hygiene pads have been disclosed having improved body contact for receiving the body exudates by three-dimensionally shaping the article.

30

US-A-5.300.055 (Buell) discloses an absorbent article having a body facing surface which has a convex upward surface, such that the total article either takes the shape of an "inverted U" (i.e. the opening of the U facing away from the wearer) or of a "W". In WO 95/31165 (Olsen) a similar

35

article is described, aiming at a "W" shaped configuration by means of a resilient component as an integral part of the article.

5 In WO 95/17148 (Bergman), sanitary napkins are disclosed, which achieve an improved contact between the labia of the wearer and the article for improved fluid (i.e. menses) handling capability. Also WO 88/04547 (Thoren) describes a sanitary napkin aiming at improved contact between the article and the wearer by attaching elastic members both in MD and in CD direction to that side of the topsheet which is oriented away
10 from the wearer. Also EP-A-0.302.523 (Lassen) describes an anatomically - shaped feminine pad, made by forming, moulding or other forming techniques.

15 In US-A-5.098.4233 (Pieniak) fit aspects of absorbent articles such as baby diapers are discussed. The primary focus is put against narrow crotch widths, such as by folding the diaper in the crotch region 2x, 4x, 6x, or 8x. Such folding could be achieved by so called W-folding, whereby the absorbent article takes the shape of a "W". There is no disclosure about the shaping or folding of the core in relation to the chassis elements.

20 However, prior art has not sufficiently considered, what the specific requirements and benefits of shaping in the context of adult incontinence articles or baby diapers with relatively high amounts of fluid discharges are.

25 Also, the prior art failed to achieve further benefits of specific shaping for articles intended for receiving faecal material.

Hence, there is still a need to improve both the comfort aspects of such articles and the handling of the body exudates at the same time.

30 Objects of the invention

Hence it is an object of the present invention to provide absorbent articles particularly designed for receiving relatively large amounts of body exudates such as urine, whereby the articles do not raise the discomfort for
35 the wearer unduly, without detrimentally impacting on performance of the article.

It is a further aspect of the present invention, to provide such articles having additionally improved handling capability with regard to feces.

5 It is a further object of the present invention to provide designs which at the same time satisfy these requirements and allow easy application to the wearer, either by him- or herself, or by another person such as a parent or a caretaker.

10 Summary

The present invention relates to absorbent articles comprising a means to achieve or maintain a convexo-concave shape with an upwardly bulged (i.e. towards the wearer during use) center crotch part, and outwardly
15 bulged parts at the longitudinal ends of the article following the body curvature to surround the waist.

Brief description of drawings

20 Figure 1 shows an absorbent pad as an example of an absorbent element;

Figure 2a shows the cross-sectional view of a thin slice of the urinary
25 loading zone of an article bunched in the Ω -shape according to the present invention;

Figure 2b shows the cross-sectional view of a thin slice of the urinary
loading zone of a comparative prior art article in a W-fold shape.

30

Detailed description

An absorbent article generally comprises:

- an absorbent member (often referred to as core or core structure,
35 which may consist of sub-structures);
- "chassis elements", such as

- a fluid impervious backsheet;
- optionally further features like closure elements
- or elastification.

5 Within the context of the present description, an absorbent article can be "unitary", i.e. all elements are adjoined together such that the article is - when being used - essentially one piece, or the absorbent article can consist of separate elements, such as having an absorbent element and an external fixation element, e.g. a re-usable fixation stretch garment such as
10 often practiced for the adult incontinence articles in form of a elasticized pant combination with an absorbent disposable pad.

15 In either case, the article or its elements can be disposable or reusable, whereby the term "disposable" is used herein to describe absorbent articles or elements which are not intended to be laundered or otherwise restored or reused as an absorbent article or element (i.e. they are intended to be discarded after a single use and, preferably, to be recycled, composted or otherwise disposed of in an environmentally compatible manner).

20 The absorbent article has a lateral direction (x direction or width) defined as the direction parallel to the lateral centerline and being aligned with a "left-to-right" direction of the wearer when being used; the longitudinal direction (y direction or length) being defined as the direction parallel to the longitudinal centerline and being aligned with the height
25 direction of a wearer in a standing position during use; and the axial direction (Z direction or thickness) being defined as the direction extending through the thickness of the diaper 20.

30 The term "concave" means - in the context of the present invention - a curvature which is "outwardly bulged", such as when following the general curvature of the waist of a human wearer, i.e. a belt worn around the waist would exhibit a generally concave curvature. The term "convex" relates to the opposite curvature. Of course, these terms are relative, and also linked to terms "upwards" and "downwards", which follow the general
35 understanding of gravity. Henceforth, a letter "U" would have a "downward convex", or a concave, shape. The Greek capital letter Ω (Omega) has in

the center part an "upwardly convex" curvature. If the terms "concave" and "convex" are used without an "upward" or "downward" direction, the meanings is as with "upward". If these terms are used in referring to a wearers position, this is assumed, unless otherwise noted, that the wearer
5 is in a standing position.

In Fig. 1 a, b, and c the present invention is exemplified by describing the absorbent element of an absorbent article, which could be a baby
10 diaper or an adult incontinence pad.

The pad comprises an absorbent core 10, designed for absorbing and containing fluids, in most instances primarily aqueous based. The absorbent core 10 may be any absorbent means which is generally
15 compressible, conformable, and capable of absorbing and retaining primarily aqueous liquids. Examples of suitable absorbent materials include comminuted wood pulp, creped cellulose wadding; meltblown polymers; chemically stiffened, modified or cross-linked cellulosic fibres; tissue including tissue wraps and tissue laminates; absorbent foams; absorbent
20 sponges; superabsorbent polymers; absorbent gelling materials; or any equivalent material or combinations of materials. The configuration and construction of the absorbent pad may also be varied (e.g., the absorbent pad may have varying caliper zones, a hydrophilicity gradient, a superabsorbent gradient, or lower average density and lower average
25 basis weight acquisition zones; or may comprise one or more layers or sub-structures). Preferably the absorbent pad has an essentially flat configuration so as to avoid complications which could arise from having a strongly three dimensionally shaped form.

30 Exemplary absorbent structures for use in the absorbent pad as used in the disposable industry are described in U.S. Patent 4,610,678 entitled "High-Density Absorbent Structures" issued to Weisman et al. on September 9, 1986; U.S. Patent 4,673,402 entitled "Absorbent Articles With Dual-Layered Cores" issued to Weisman et al. on June 16, 1987;
35 U.S. Patent 4,888,231 entitled "Absorbent Core Having A Dusting Layer" issued to Angstadt on December 19, 1989; and U.S. Patent 4,834,735,

entitled "High Density Absorbent Members Having Lower Density and Lower Basis Weight Acquisition Zones", issued to Alemany et al. on May 30, 1989. Other absorbent pad designs are described in European Patent Application No.'s 93305150.0 and 93309614.1.

5

US patent no 4,411,660 discloses in an absorbent product two layers of absorbent material of different types, such that the upper layer gels slower than the first layer.

10 European Patent Specification EP-B-0 401 189 discloses that favorable properties of absorbent products can be achieved by using two different types of absorbent gelling material in separate layers, rather than as a mixture of the two absorbent gelling materials in a single layer.

15 The hydrogel-forming absorbent polymers useful in the present invention include a variety of substantially water-insoluble, but water-swella- ble polymers capable of absorbing large quantities of liquids. Such polymers materials are also commonly referred to as "hydrocolloids", or "superabsorbent" materials. These hydrogel-forming absorbent polymers
20 preferably have a multiplicity of anionic, functional groups, such as sulfonic acid, and more typically carboxy, groups. Examples of polymers suitable for use herein include those which are prepared from polymerizable, unsaturated, acid-containing monomers. Thus, such monomers include the olefinically unsaturated acids and anhydrides that contain at least one
25 carbon to carbon olefinic double bond. More specifically, these monomers can be selected from olefinically unsaturated carboxylic acids and acid anhydrides, olefinically unsaturated sulfonic acids, and mixtures thereof.

As described above, the hydrogel-forming absorbent polymers are
30 preferably slightly network crosslinked. Network crosslinking serves to render the polymer substantially water-insoluble and, in part, determines the absorptive capacity and extractable polymer content characteristics of the precursor particles and the resultant macrostructures. Processes for network crosslinking the polymers and typical network crosslinking agents
35 are described in greater detail in the herein before-referenced U.S. Patent 4,076,663, and in DE-A-4020780 (Dahmen).

In order to be able to compare absorbent articles for varying end use conditions, or differently sized articles, the "design capacity" has been found to be a suitable measure.

5

For example, babies are representing a typical usage group, but even within this group the amount of urine loading, frequency of loading, composition of the urine will vary widely from smaller babies (new-born babies) to toddlers on one side, but also for example among various individual toddlers.

10

Another user group may be larger children, still suffering from a certain form of incontinence.

15

Also, incontinent adults can use such articles, again with a wide range of loading conditions, generally referred to as light incontinence ranging up to severe incontinence.

20

Henceforth, absorbent articles being able to cope with such requirements should have the capability of picking up such amounts of urine, which will be referred to for the further discussion as "design capacity", which is described in more detail below.

25

These amounts of fluids have to be absorbed by materials which can ultimately store the bodily fluids, or at least the aqueous parts of these, such that - if any - only little fluid is left on the surface of the article towards the wearers skin. The term "ultimate" refers in one respect to the situation as in the absorbent article at long wearing times, in the other respect to absorbent materials which reach their "ultimate" capacity when being equilibrated with their environment. This can be in such an absorbent article under real in-use conditions after long wearing times, or this also can be in a test procedure for pure materials or material composites. As many of the processes under consideration have asymptotic kinetic behavior, one skilled in the art will readily consider "ultimate" capacities to be reached when the actual capacity has reached a value sufficiently close to the asymptotic endpoint, e.g. relative to the equipment measurement accuracy.

30
35

As an absorbent article can comprise materials which are primarily designed to ultimately store fluids, and other materials which are primarily designed to fulfill other functions such as acquisition and/or distribution of the fluid, but may still have a certain ultimate storage capability, suitable core materials according to the present invention are described without attempting to artificially separate such functions. Nonetheless, the ultimate storage capacity can be determined for the total absorbent core, for regions thereof, for absorbent structures, or even sub-structures, but also for materials as being used in any of the previous.

As discussed in the above for varying the dimensions of the article, one skilled in the art will be able to readily adopt the appropriate design capacities for other intended user groups. For example, for Adult Incontinence articles intended for use with severely incontinent persons can contain 9 g of superabsorbent material having an absorbent capacity of about 31 ml/g when submitted to the well known Teabag centrifuge capacity test, and contain 97 g of conventional cellulosic airfelt having a capacity of about 4 ml/g, thus resulting in a total ultimate storage capacity of about 667 ml. Other examples relate to articles for light incontinent persons. For example ATTENDS MINI has an ultimate storage capacity of about 70 ml, ATTENDS MINI PLUS of 90 ml, or ATTENDS NORMAL of about 167 ml, with all these products sold by Procter & Gamble in various countries in Europe.

Referring again to Figures 1, said absorbent core has waist regions 14, 15 next to the longitudinal edges 12, 13, and a crotch region 11 connecting these regions 14, 15, which has a minimum width ϕA ". As exemplified in Fig. 1a, the width in the waist region 14, 15 is about twice the width of the crotch region 11.

The absorbent core 10 is connected with a fluid impervious backsheet 16. The backsheet 16 may comprise a woven or nonwoven material, polymeric films such as thermoplastic films of polyethylene or polypropylene, or composite materials such as a film-coated nonwoven material. Often, the backsheet is a thermoplastic film having a thickness of

from about 0.012 mm (0.5 mil) to about 0.051 mm (2.0 mils), such as a blown or cast PE film as available under the designation RR8220 (blown films) and RR5475 (cast films) as manufactured by Tredegar Industries, Inc. of Terre Haute, IN. Such a backsheet 16 is preferably embossed and/or matte finished to provide a more clothlike appearance.

Further, and often preferably, the backsheet 16 may permit vapours to pass through while still preventing liquids from penetrating through the backsheet 16.

Backsheet 16 may have both width and length dimensions exceeding the dimensions of the absorbent core 10, thereby forming peripheral edges. The region of the backsheet 16 which extend outwardly of the core in longitudinal direction is referred to as endflaps.

The relatively wide lateral edges 17, 18 of the backsheet 16 are folded inwardly so as to at least partially overlaying the absorbent core 10. The free longitudinal edges 19, 20 comprise an elastification feature 21, 22, such as an elastic band or stripe. When the absorbent article is stretched out flat as indicated in Fig. 1 these elastic features are stretched so as to allow contraction for better body conformity during use.

The lateral edges 17, 18 are now in a tubular arrangement 23, 24 with the unfolded parts, whereby the stretched elastics which are connected at their ends with the edges 25, 26 respectively 27, 28 of the inwardly folded lateral edges 17, 18.

A topsheet 29 is positioned on the absorbent core 10 oriented towards the wearer during use. The topsheet 29 is compliant, soft feeling. Further, the topsheet 29 is liquid pervious permitting fluids like urine liquids to readily penetrate through its thickness. A suitable topsheet may be manufactured from a wide range of materials, such as porous foams; reticulated foams; apertured plastic films; or woven or nonwoven webs of natural fibres (e.g., wood or cotton fibres), synthetic fibres (e.g., polyester or polypropylene fibres), or a combination of natural and synthetic fibres. There are a number of manufacturing techniques which may be used to

manufacture the topsheet 29. For example, the topsheet 29 may be a nonwoven web of fibres spunbonded, carded, wet-laid, meltblown, hydroentangled, combinations of the above, or the like. An often used topsheet is carded and thermally bonded by means well known to those skilled in the fabrics art, for example made of staple length polypropylene fibres such as is manufactured by Veratec, Inc., a Division of International Paper Company, of Walpole, Massachusetts under the designation P-8.

The topsheet may be essentially attached throughout most or all of the surface of the absorbent core, or it may be only partially bonded thereto. The topsheet may comprise apertures to ease penetration of exudates there through, such as urine or faeces. The topsheet may further be fully or partially elasticated.

In order to keep the absorbent element as described in the above on the body of the wearer and in registry with the body fluid releasing body openings, the absorbent article has to have one or more fixation means.

Such a fixation means can of the mechanical type, i.e. essentially aiming at overcoming the gravitational forces and / or the frictional forces between the article and outside elements, such as the outer clothing of the wearer and /or the bedding elements by exploiting the frictional forces between the article and the skin of the wearer, or structural support forces such as registry with body contours such as hip bones of the wearer.

The absorbent element may alternatively be hold in place by conventional closure systems to fix the article or the absorbent element around the waist of the wearer, such as by integral tape systems, which can comprise adhesive coated tapes or mechanically engaging elements.

Thereby, the absorbent article or the absorbent element is provided with a closure system comprising a tape tab fastening device and a landing member. The tape tab fastening device comprises an attachment area and a functional area, and the landing member is preferably a reinforcing strip or the alternative a portion of the backsheet. The functional elements may take on a number of configurations such as adhesive fastening elements,

mechanical fastening elements, a combination of adhesive fastening elements and mechanical fastening elements, or any other means as are known to the man skilled in the art.

5 For these closure systems which encircle the waist of the wearer, the article is preferably further comprising elastification features operatively connected with these closure feature, so as to enhance and sustain the fit of the article during use.

10 Absorbent articles, which are sometimes referred to as "pant-style diapers" are unitary articles with a pant style design - i.e. with closed side seams to form a fully closed structure in the waist region - together with elastification features to allow fixation as the mentioned elastic pant, and
15 further described in EP application number 96112413.8, filed on August 1, 1996.

20 Alternatively, an absorbent element such as described in the above, may simply have a means for attaching it to the normal underwear of the user, such as often applied for light feminine hygiene articles, such as so-called "panty liner", and indicated in Fig. 1c by fixation means 30.

25 An even further alternative has a fastening means of the topical adhesive attachment type. Such "body adhesive" means aim at fixation of the article directly to the skin of the wearer, and are described such as in EP application number 9710666.91.

30 A further embodiment of the present invention relates to non-unitary articles, comprising an absorbent element and a separate fixation means or garment such as a net or stretch pant, which can be used either as replacement or in addition to the regular underwear of the wearer. A similar approach to such non-unitary elements can be an attachable belt as described in EP-A-0.409.307 (Gipson et al.)

35 Further, absorbent articles according to the present invention can have several of the above mentioned fixation means, such as having both a

body adhesive applied to the absorbent element, and an additional stretch or garment in a dual fixation means arrangement.

- 5 In case of a non-unitary arrangement, both the absorbent element and the fixation element can be disposable, or one of these or both can be reusable, such as after washing.

Ω- (Omega)-shaped absorbent articles

10

In addition to the features as described above, the following embodiments make the present invention particularly suited for being used to receive urinary and / or fecal exudates.

- 15 The first and essential element is a feature to provide a convex bulging at least in the crotch region, and in particular at least in the urine loading region or zone, during application of the article to the wearer and / or during use. The urine loading zone is generally located somewhat, i.e. often about 5 cm, forward from the crotch point of the article, which corresponds to the
20 narrowest width dimension of the stiffest part of the article.

- This convex bulging can be achieved by means arranged in the crotch region of the article and in particular in the urinary loading zone of the article, with positioning the center line of the article during use in closer
25 proximity to the body of the wearer than the lateral side edges of the absorbent member closer together than in a flat shape and thus have its center line positioned closer towards the wearer's body than the side edges, such that the absorbent member is in fact upwardly bulging towards the wearer.

30

- In Fig. 2a, such an absorbent core 228 is forming the upwardly convex shape (i.e. the center part of an Ω (Omega)). The lower parts of the Ω (Omega) are formed by chassis elements, i.e. primarily backsheet materials such as films and/or nonwovens. This configuration is referred to
35 as "Ω-bunching".

This convex Ω -shape of the absorbent core has to be at least around the urinary loading point, preferably extending at least about ± 2.5 cm to the front and towards the back of the article. In order to allow comfortable wearing, this convex shaping of the crotch region core will transition into a
5 concavely shaped curvature of the front and rear waist parts of the article to fit well around the waist of the wearer.

The elastic elements to keep the side margins of the article in contact with the wearers legs are also positioned with the zones of the lower part of
10 the Ω .

This provides particular benefits versus prior art articles adopting the shape of a "U", or the shape of a W as depicted in Fig. 2b, schematically showing a cross-section through a thin slice of a prior art article 320, with
15 the total absorbent element shaped or folded in this W-form.

The Ω - (Omega)-bunching of the present invention allows to form pockets of longitudinally shape outside of the absorbent member, which can provide certain benefits during use. As the absorbent member will be
20 loaded with at its top "ridge" (230), it will on one side catch the body exudates effectively, as there is only little room for the fluids to go elsewhere. Second, gravity aids - even when high performance materials and structures are used - the penetration of the fluid into the receiving material, thereby minimizing the residence time of the liquid on the surface,
25 and thus the potential for wetting the skin of the wearer or for leaking to the outside.

This advantage becomes even more pronounced, when being combined with core structures having a sub-optimal liquid handling
30 performance. Even if the urine would not penetrate into the article immediately upon contact with the article, it would "run off" along the slopes of the upwardly oriented convex bulge (i.e. the slopes of the Ω [Omega]). If - as might occur with cores of lower performance or capacity - the core is (permanently or momentarily) saturated in this wetted region, fluid that
35 would not penetrate into the core, will be caught by the impermeable sides

of the Ω (Omega), which provide good sealing against the outer clothing of the wearer by the liquid impermeable backsheet (216).

5 A further advantage becomes apparent in figures 2a and 2b, wherein the absorbent core is depicted after it has absorbed significant amounts of urine. This leads to imminent swelling of the core as indicated by the borders after swelling 240 and 242, which, in case of a conventional "W-folded" core, will fill the deeper parts of the W, almost creating a completely filled cup - in particular under the impact of movement of the wearer. In
10 particular for cores comprising superabsorbent materials, which tend to reduce liquid permeability of the matrices they are comprised in, this can lead to the situation where the lower parts of the W (oriented away from the wearer), are hindered in their swelling - be this by geometrical expansion constraint or by lack of fluid transport to these parts.

15 In case of the present invention, however, the core will swell only the convex bulging of the " Ω ", without substantially impeding negatively fluid transport.

20 If in combination with a high performing core, the functionality of the Ω -bunching with regard to fluid handling changes: now the requirement for the lateral seal becomes less important, but the " Ω -ridge" (230) provides CD-directional flow, which however, will increase the liquid acquisition rate by increasing the loading area in CD-direction, thus also enabling
25 significantly improved longitudinal fluid distribution.

Further, when the article is loaded with feces, these can be deposited into these longitudinally oriented pockets positioned laterally outwardly of the absorbent core, thereby leaving the surface of the absorbent member
30 free for receiving further urinary loading. In particular with relatively thin (or runny, or lower viscosity) feces, these can - e.g. when the wearer is in a standing position due to gravity - flow further down into the crotch region. However, having an upward bulge there, and non-absorbent side sealing, the feces will not cover the absorbent core and not deteriorate its
35 functionality as to receiving urine.

In both instances, the backsheet (216) has to withstand such loading, and must not - even when designed to allow vapors to penetrate through - allow permeation under normal in-use conditions.

- 5 As it will also be readily appreciated, these longitudinal side pockets need to be sealed against the skin of the wearer, such as by elastic means (234), positioned between the backsheet (216) and the topsheet (236).

10 For the scope of the present invention, such pockets may also be formed by so called "leg-cuffs" as well known in the art such as for baby diaper, e.g. in EP-A-0.263.720. In a preferred embodiment of such "leg cuffs", the upstanding part of the secondary cuff is positioned laterally outwardly from the fixed base part of the same cuff, such that it is avoided that these cuffs align on the surface of the absorbent core, and thus reduce
15 the ability to quickly receive even repeated gushes well.

A particularly preferred embodiment for the present invention comprises a chassis whereby these pockets are made by inwardly folding and attaching the backsheet and topsheet material having elastic strands
20 at its longitudinally running edges, such as described in EP-A-0.098.512 (Beckestrøm).

A further element of the present invention results from the transition of the convex bulging in the crotch zone to a concave bulging in the waist
25 zone when being worn.

As is well known from static considerations, arc-like structures have a certain structural strength. This structural strength is an essential element of the present invention in the crotch region, whereby the upward bulging
30 creates such an arc-like structure. As indicated in the above, this convex bulging has to be transformed into a concave structure in the waist region of the article. As can be readily visualized with piece of paper which is folded in one direction in the middle and into the opposite direction at either end, this transition zone has a significant strength and resistance to
35 deformation. In the current context, this results in "pockets" being formed - or void spaces between the article and the body of the wearer - during use.

Such pockets can have a desired effect, as feces can be caught in void spaced formed by the Ω -bunching on the wearer, namely where the convex shape in the crotch region transforms into the concave shape in the rear upper waist part of the article, creating a "rear feces pocket". Such pocket
5 can have a volume suitable for receiving fecal discharges, and comprise from about 10cm³ to about 500cm³ or more.

Such pockets also can have a benefit in a gender specific article design, namely when such a pocket is formed by the front transition zone,
10 thereby forming a space for male genitals.

Such pockets may also be undesired, for example in articles intended for light incontinence use without intention to be loaded with feces, or in the front zone of a genderized female usage product, especially with absorbent
15 cores being relatively stiff by themselves (such as through highly densified cellulosic structures)

In all cases, it will be desirable to have the transition not at an arbitrary position, but rather at the desired location. Henceforth, a preferred
20 embodiment of the present invention includes "hinges" for defined transitioning from the convex to the concave shape.

The relative dimensions of the convex, concave and transition regions depends of course on the intended use and wearer. However, generally
25 human body configurations are such that the lateral extension of the article during use should be small, preferably less than 7 cm, more preferably less than 5 cm, and most preferably even less than about 4 cm. In case of a W-folded core, this dimension relates 4 times the core thickness, in case of the Ω -bunched core, this relates to only 2 times the core thickness (upon
30 neglecting the thickness of the non-core related materials). The length of the convexly bunched region should be at least about 5 cm, to allow adequate contact in the discharge region. The upper limit for this region depends on the intended use, and ranges from only little more than the minimum of 5 cm as describe (e.g. for female, urinary incontinence
35 products) to about 20 cm for articles intended to also receive feces and requiring an "rear feces pocket".

After having described how the various elements of the present invention interact with each other, a more detailed description of the individual features will follow.

5

Means for sustained Ω (Omega)-shape

At present, many absorbent articles are produced flat, i.e. having no specific three-dimensional shape. The person who applies the article (i.e. the user him- or herself, or a helping person such as caretaker, parent or the like) can apply the article in various shapes, and by various application steps.

Even if absorbent articles are applied to the wearer such that they form the preferred Ω -shape at least in the crotch zone, normal in-use movements or the loading itself can result in the Ω -shape not being maintained sufficiently pronounced and / or for a sufficiently long period. Thus, in order to maintain the Ω -shape, the article is provided with a means for enhancing maintenance of the Ω -shape during application of the article to the wearer, and also during the use period.

Such a means to provide Ω -bunching can be any means, which is able to deform or to maintain the deformation of the absorbent member in the crotch region such that the above describe shape is formed during application and during use

The most simple way to achieve the Ω -shape during application of the article to the wearer is the folding of the article in the appropriate shape by the manufacturer. Therefore, the article needs to be folded along the longitudinally extending centerline such that the topsheet, which is intended to be oriented to the wearer during use, lies outwardly and the backsheet, which is intended to lie outwardly or towards the clothing of the wearer inwardly of this folded part, which must comprise at least the crotch region, and especially the loading region. With this folding, the person applying the article has a means to readily achieve the Ω -bunched shape upon application.

Alternatively, the article can be folded in any way by the manufacturer, but it comprises a means which just prior to application creates the Ω -shape or supports the Ω -shape when manually created by the person
5 applying the article.

Such means can be elastic features, which - when being in a non- Ω -shape configuration - are stretched, and which contract upon application, thereby forming the Ω -shape, or it can be means for affixing respective
10 backsheet parts to each other.

One way to achieve this is by simply applying adhesive means in a conventional manner similar to the adhesives applied in feminine hygiene products as so called "panty fastening adhesives" for affixing the article to
15 the panty of the wearer. In the present case, however, the objective is to attach backsheet parts not to wearers clothing, but together.

The adhesive can be applied during the manufacturing and then be covered by release papers as well known for the "panty fastening
20 adhesives". The release paper will then be removed at the time of application, just before the respective parts of the backsheet are brought together to form the Ω -shaping. It becomes apparent, that in the first case, packing and shipping of the article is easier, whilst in the second case care must be taken so as to not damage / deteriorate the shaping during
25 transport.

Alternatively, the Ω -shape can be created during manufacturing of the article. In this case, such an adhesive means can be applied to the article when being flat and in an unbunched shape, and the respective parts of the
30 backsheet are then brought together so as to create the bunching.

A further alternative for such an Ω -bunching means is to use mechanical attachment means, such as generally referred to as "mechanical fastening means", whereby a first member being applied to
35 one part (e.g. made of hooks) is mechanically engaging in a second member (e.g. a looped landing zone).

An even preferred alternative for affixing the respective parts of the backsheet together is by not doing so in a firm way but by allowing some relative movement of the backsheet surfaces vs. each other in the longitudinal direction. This relative movement provides particular benefits during the movement of the wearer, such as when walking. Then, the Ω -shaped tunnel will be somewhat "distorted" without, however losing its functionality nor its general Ω -shape.

10 This is particularly useful, if the articles are intended to be worn by mobile persons, such as mobile, non-bed-ridden adults, or toddlers, as it will allow increased comfort during walking.

Such a feature can be one or more elastic bands or stripes (such as indicated with 240 in Fig. 2a) having at least a CD-directional contractional force component. They can be attached towards the lateral edges (i.e. towards the waist regions) of the backsheet but not to the central part (i.e. in the crotch region) of the backsheet, thus pulling together the lateral edges, thus forming the upward bulge or Ω -bunch. Whilst the elastic means for the present invention not necessarily has to be affixed at the outer edges (i.e. the lower base of the " Ω "), care must be taken to shape the article such that only the upper convex part of the Ω is formed by the absorbent core and not a complete W shape is taken, thereby (i.e. to have no absorbent core in the region of the side flaps 225). This can be achieved by the core having a certain stiffness in combination with the structural stiffness resulting from the bunching.

Such elastic elements can be positioned outside the backsheet, or inside, they should however be positioned underneath the absorbent core member (i.e. directed away from the wearer), as otherwise the risk of resulting in a U-shape configuration is too high.

Application of CD-directional stretch features has been disclosed for example in EP-A-0.652.175.

Another preferred alternative can be to position the fixation means in some distance from the backsheet such as by a spacer or block element, thereby forming a hinge between the left and right side of the lateral longitudinal edges of the article.

5

In another preferred embodiment, not only the backsheet parts are brought into close contact, but also to further bond the total absorbent member through its entire thickness.

10 This allows that the shape will be maintained better even under stressful in-use conditions.

This bond should, whilst being sufficiently strong to withstand in use stress and also wetting, be sufficiently soft to not increase the discomfort of
15 the wearer.

Other ways to achieve bonds between the backsheets, between backsheet and additional means for maintaining and sustaining Ω -bunching are other well known techniques such as glue application, melt-bonding,
20 and the like.

A particularly preferred execution in the context of a air-permeable backsheet such as a nonwoven material is the application of pointwise application of hot air thereby melt-bonding certain parts of the structure
25 together.

In a further execution of the present invention, the upwardly oriented convex shaping (i.e. the Ω -shape) of an absorbent member can be sustained by a separate means which creates an upwardly oriented force
30 in the crotch region (i.e. towards the wearer during use).

In a first execution, such a lifting element can be integrated into a unitary article, such as by positioning elastic elements, which have a contractional force component in the longitudinal direction of the article, on
35 the side of the absorbent member, which is during use oriented away from the wearer. Thereby, the elements should be at least in the crotch and/ or

loading zone be in the longitudinal centre line zone, i.e. be not too far away from the longitudinal centre line to form the Ω -bulge, which generally can be achieved if these are not less than 2.5 cm offset the centre line in either / or left and right direction.

5

In a second embodiment, such a lifting element can be in a separate element, which is not integral or unitary with the element of the absorbent core (i.e. the absorbent pad). Such means can be a separate garment, such as a net pant, to be worn over the absorbent article. A particularly preferred garment for such an application is described in co-filed Patent Application, Attorney Docket, CM1637Q.

Such a suitable garment comprises an elasticized waistband, a front panel having first and second sections, a rear panel having first and second sections, a crotch region disposed between and joining the front panel to the rear panel and a pair of elasticized leg openings. The first section of the front panel has a greater resistance to stretching in the lateral direction than the second section of the front panel. The first section of the rear panel has a greater resistance to stretching in the lateral direction than the second section of the rear panel. The crotch region is provided with a longitudinal stretch control member that is disposed along the longitudinal centerline of the undergarment. The longitudinal stretch control member limits the stretch of the crotch region in the longitudinal direction causing the crotch region to conform to a wearer's skin surface. A front stretch control member is disposed in the front panel and extends from the longitudinal stretch control member to the waistband. A rear stretch control member is disposed in the rear panel and extends from the longitudinal stretch control member to the waistband.

While such a suitable garment can be assembled from materials that may be known to the art as having the requisite mechanical properties, it is preferably knit, such that the mechanical properties of the various components thereof can be provided by a combination of the knit pattern used for a particular component and the yarns that are used. In a particularly preferred embodiment, the longitudinal stretch control member is integrally knit with the crotch region, the front stretch control member is

integrally knit with the front panel, and the rear stretch control member is integrally knit with the rear panel.

Further, two or more of the above elements may be combined in the absorbent article. For example, a pre-folded absorbent pad can be held in place by means of the preferred stretchable garment, as described in the above. Or, a non-prefolded pad can be brought into the Ω -shape configuration by an elastic which is in an extended state during shipment, and upon application creates the Ω -shape configuration, and this pad can be held in place by a conventional stretchable garment, such as a pant, without a specific feature for sustaining the Ω -shape, or by a improved Ω -shape supporting garment. Also, the combination of body adhesives with a pre-folded unitary article comprising MD oriented elastification means for providing a lifting force on the crotch or loading zone can be suitable.

15

Hinge lines

As has been explained in the above, the "convexo-concave" transition should not be positioned arbitrarily, but should happen at a desired place. This can be achieved by including a "hinge means" in the article, and in particular in the absorbent core, if this is the stiffest element of the article.

Without this additional means, this transition will generally occur somewhat outside the crotch region, both in the front and back region, where due to the absence of the restraining legs of the wearer, the Ω -shape can flatten, and thus allows somewhat easier transition, which still might result in undesired deformation or weakening of the structure.

Thus, it becomes clear, that it will be highly beneficial to define the transition region from concave bulging to convex bulging, which can be achieved by creating hinge lines within the absorbent structure.

Such hinge lines can be created by various means, such as cutting, or embossing (i.e. creating high density lines throughout the absorbent, such that the bending at the edges of these high density lines is eased), or low

density lines (e.g. created by forming the article with regions having a lower basis weight of materials, but maintaining the same caliper).

5 The hinge lines to enhance the convexo-concave transition must extend from the outer longitudinal edges of the core or the stiffness determining element of the article into the direction of the longitudinal center line, i.e. the hinge lines have to be arranged such that they have a cross-directional orientation. These hinge lines can be straight lines or curved ones thereby allowing optimization of the specific design of the article, and the anatomy of the intended wearer group. Also the length of the hinge lines can be readily adopted. Also, several independent lines can be used within each one of the transition zones, or one line can split into other. Preferably, such hinge lines do not run through the full width of the absorbent member, as this might result in an undesired loss in strength, or integrity, in particular during use.

20 Such hinge lines can be created by various means, such as cutting, or embossing (i.e. creating high density lines throughout the stiff member such as the absorbent core, thereby easing the bending at the edges of these high density lines), or low density lines (e.g. as achieved by creating lower basis weight zones of material in the stiff element and densifying it to a lesser degree than the surrounding higher basis weight regions).

Design Capacity and Ultimate Storage Capacity

25

In order to be able to compare absorbent articles for varying end use conditions, or differently sized articles, the "design capacity" has been found to be a suitable measure.

30 For example, babies are representing a typical usage group, but even within this group the amount of urine loading, frequency of loading, composition of the urine will vary widely from smaller babies (new-born babies) to toddlers on one side, but also for example among various individual toddlers.

35

Another user group may be larger children, still suffering from a certain form of incontinence.

Also, incontinent adults can use such articles, again with a wide range of loading conditions, generally referred to as light incontinence ranging up to severe incontinence.

Henceforth, such articles being able to cope with such requirements should have the capability of picking up such amounts of urine, which will be referred to for the further discussion as "design capacity".

These amounts of fluids have to be absorbed by materials which can ultimately store the bodily fluids, or at least the aqueous parts of these, such that - if any - only little fluid is left on the surface of the article towards the wearers skin. The term "ultimate" refers in one respect to the situation as in the absorbent article at long wearing times, in the other respect to absorbent materials which reach their "ultimate" capacity when being equilibrated with their environment. This can be in such an absorbent article under real in-use conditions after long wearing times, or this also can be in a test procedure for pure materials or material composites. If the processes under consideration have asymptotic kinetic behavior, one skilled in the art will readily consider "ultimate" capacities to be reached when the actual capacity has reached a value sufficiently close to the asymptotic endpoint, e.g. relative to the equipment measurement accuracy.

As an absorbent article can comprise materials which are primarily designed to ultimately store fluids, and other materials which are primarily designed to fulfill other functions such as acquisition and/or distribution of the fluid, but may still have a certain ultimate storage capability, suitable core materials according to the present invention are described without attempting to artificially separate such functions. Nonetheless, the ultimate storage capacity can be determined for the total absorbent core, for regions thereof, for absorbent structures, or even sub-structures, but also for materials as being used in any of the previous.

In case of applying the present invention to other articles requiring different end-uses, one skilled in the art will be able to readily adopt the appropriate design capacities for other intended user groups.

- 5 In order to determine or evaluate the Ultimate Design Storage Capacity of an absorbent article, a number of methods have been proposed.

10 In the context of the present invention, it is assumed, that the Ultimate Storage Capacity of an article is the sum of the ultimate absorbent capacities of the individual elements or material. For these individual components, various well established techniques can be applied as long as these are applied consistently throughout the comparison. For example, the Tea Bag Centrifuge Capacity as developed and well established for superabsorbent polymers can be used for such materials, but also for others (see above).

15 Once the capacities for the individual materials are known, the total article capacity can be calculated by multiplying these values (in ml/g) with the weight of the material used in the article.

20 For materials having a dedicated functionality other than ultimate storage of fluids - such as acquisition layers and the like - the ultimate storage capacity can be neglected, either as such materials do in fact have only very low capacity values compared to the dedicated ultimate fluid storage materials, or as such materials are intended to not be loaded with fluid, and thus should release their fluid to the other ultimate storage materials.

25 With such definitions, for example a so-called "panty liner" product exhibits very low Ultimate storage capacities of a few ml or less. Feminine Hygiene pads have often up to about 20 ml, light urinary incontinence articles have for example 75 ml or about 90ml, medium urinary incontinence articles, or also smaller baby diaper can have about 165 ml, and toddler size baby diapers reaching 300 ml or more, and severe adult incontinence article having 600 ml or more of ultimate storage capacity.

Teabag Centrifuge Capacity Test

5 The Teabag Centrifuge Capacity test measures the Teabag Centrifuge Capacity values, which are a measure of the retention of liquids in the gelling material at hydrostatic pressure.

10 The superabsorbent material is placed within a "teabag", immersed in a 0.9 % by weight sodium chloride solution for 20 minutes, and then centrifuged for 3 minutes. The ratio of the retained liquid weight to the initial weight of the dry superabsorbent material is the absorptive capacity of the superabsorbent material.

15 2l of 0.9% by weight sodium chloride in distilled water is poured into a tray having dimensions 24cm x 30 cm x 5cm. The liquid filling height should be about 3cm.

20 The teabag pouch has dimensions 6.5cm x 6.5cm and is available from a company called Teekanne in Dÿsseldorf, Germany. The pouch is heat sealable with a standard kitchen plastic bag sealing device (e.g. VACUPACK₂ PLUS from Krups, Germany).

25 The teabag is opened by carefully cutting it partially, and is then weighed. A 0.200g +/- 0.005g sample of the superabsorbent material is placed in the teabag. The teabag is then closed with a heat sealer. This is called the sample teabag.

An empty teabag is sealed and used as a blank.

30 Each teabag is then held horizontally, and the sample teabag is shaken so as to distribute the superabsorbent material evenly throughout the bag. The sample teabag and the blank teabag are then laid on the surface of the saline solution, and submerged for about 5 seconds using a spatula to allow complete wetting (the teabags will float on the surface of the saline solution but are completely wetted). The timer is started immediately.

35 After 20 minutes soaking time the sample teabag and the blank teabag are removed from the saline solution, and placed in a Bauknecht WS130,

- 5 Bosch 772 NZK096 or equivalent centrifuge (230 mm diameter), so that each bag sticks to the outer wall of the centrifuge basket. The centrifuge lid is closed, the centrifuge is started, and the speed increased quickly to 1,400rpm. Once the centrifuge has been stabilized at 1,400rpm the timer is started. After 3 minutes, the centrifuge is stopped.

 The sample teabag and the blank teabag are removed and weighed separately.

- 10 The Teabag Centrifuge Capacity (TCC) for the sample of superabsorbent hydrogel-forming material is calculated as follows:
TCC = [(sample teabag weight after centrifuging) - (blank teabag weight after centrifuging) - (dry superabsorbent hydrogel-forming material weight)] + (dry superabsorbent material weight).

15

What is claimed is:

- 5 1. Absorbent article, comprising
 - a topsheet, a backsheet and an absorbent core arranged therein between,
 - a front and a rear waist region intended to conform during use with the body of the wearer in an concave shape,
 - 10 - a urinary loading zone,
characterized in that said article further comprises a means for achieving and/or maintaining a convex bulging shape of the absorbent core oriented upwardly towards the wearer at least for parts of said urinary loading zone
- 15 2. An absorbent article according to claim 1, wherein said convex bulging shape at least of the urinary loading zone is achieved by means of a prefold of the absorbent article along the longitudinal centerline of the article at least in said urinary loading zone such that at least parts of
20 the backsheet covering the absorbent core are in direct contact with each other.
- 25 3. Absorbent article according to claim 1, further characterized in that said means for maintaining the absorbent core in the crotch region in a convex bulging shape is an adhesive applied outwardly on the backsheet.
- 30 4. Absorbent article according to claim 3, further characterized in that said means for maintaining the core in the crotch region in a convex bulging shape comprises a mechanically engaging means at least a part of which being positioned laterally spaced away from the longitudinally extending center line of the article.
- 35 5. Absorbent article according to any of claims 1 to 4, further characterized in that

said means for maintaining the core in the crotch region in a convex bulging shape is an elastically contractible element with at least a CD-directional force component.

- 5 6. Absorbent article according to claim 5 further characterized in that
said means is affixed to the lateral sides of the core, and being
essentially unaffixed in the center.
- 10 7. Absorbent article according to any of claims 1 to 6, further
characterized in that it has a length and a width dimension, and a z-
direction perpendicular to both these dimensions,
said means for maintaining the absorbent core in the urinary loading
zone in a convex bulging shape is an elastically contractible element
with at least an MD-directional force component at least exerting a z-
15 directional force component oriented towards the wearer during use.
- 20 8. Absorbent article according to claim 7,
wherein said elastically contractible element forms a unitary article with
the absorbent pad.
9. Absorbent article according to claim 8, wherein said elastically
contractible element is positioned outwardly in relation to the absorbent
core.
- 25 10. Absorbent article according to claim 7,
wherein said elastically contractible element forms a non-unitary article
composed of an external fixation means and an absorbent pad.
- 30 11. Absorbent article according to claim 10, where the external fixation
means is a stretchable garment.
- 35 12. Absorbent article according to any of claims 1 to 11, further
characterized in that
it further comprising one or more convexo-concave transition means
positioned between the urinary loading zone and the one or two waist
region(s).

13. Absorbent article according to claim 12 further characterized in that said convexo-concave transition means is a or are hinge line(s).
- 5 14. Absorbent article according to claim 13 further characterized in that said one or more hinge line(s) are cuts or edges of embossing lines into or through the core.
- 10 15. Absorbent article according to any of claims 1 to 14 further characterized in that the urinary loading zone is designed to maintain convex bunching for at least 50 mm length during application and during use.
- 15 16. Absorbent article according to any of claims 1 to 15 further characterized in that the article further comprises fixation means for fixation of the article on the body of the wearer.
- 20 17. Absorbent article according to claim 16 further characterized in that said fixation means comprise tapes and landing zones which adhesively or mechanically affix the front and back waist regions of the article to each other.
- 25 18. Absorbent article according to claim 16 further characterized in that said fixation means further comprise elastic members to maintain article in position.
- 30 19. Absorbent article according to any of the preceding claims, wherein said fixation means comprises an adhesive topically applied to the skin of the wearer.
- 35 20. Absorbent article according to any of claims 1 to 19, further characterized in that the article comprises an external fixation means being non-unitary with the absorbent core.

21. Absorbent article according to claim 20 further characterized in that said external fixation means is a stretchable garment.
- 5 22. Absorbent article according to any of the preceding claims, further characterized in that
a void is formed in use between the urinary loading zone having a convex shaping with at least one of the concavely shaped waist zones, and the body of the wearer during use.
- 10 23. Absorbent article according to claim 22, wherein said void is formed as a feces receiving void which is in relation to the urinary loading zone located transversly offset to the rear.
- 15 24. Absorbent article according to claim 22, wherein
the volume of said void is minimized by having convexo-concave transition means located on the limits of the urinary loading zone.
- 20 25. Absorbent article according to claim 24, wherein said convexo-concave transition means are located within less than 2 cm of the urinary loading zone.
- 25 26. Absorbent article according to any of the preceding claims, further characterized in that
a feces receiving void is formed in use between the chassis elements extending laterally outwardly from the core in the crotch region and the body of the wearer.
- 30 27. Absorbent article according to any of the preceding claims, further characterized in that
the absorbent core has a design capacity of more than 70 ml urine.
28. Absorbent article according to claim 27, further characterized in that the absorbent core has a design capacity of more than 90 ml urine.
- 35 29. Absorbent article according to claim 28, further characterized in that the absorbent core has a design capacity of more than 165 ml urine.

30. Absorbent article according to claim 29, further characterized in that the absorbent core has a design capacity of more than 300 ml urine.

2 / 2

Fig. 2a

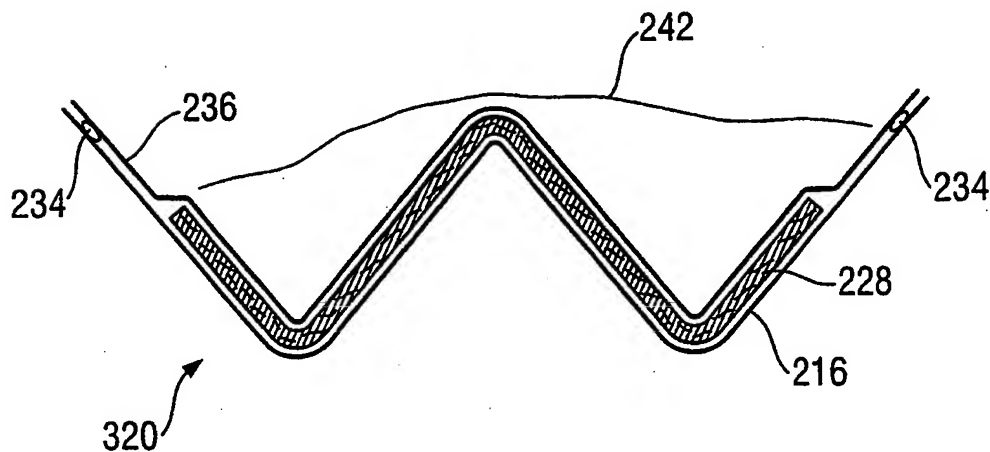
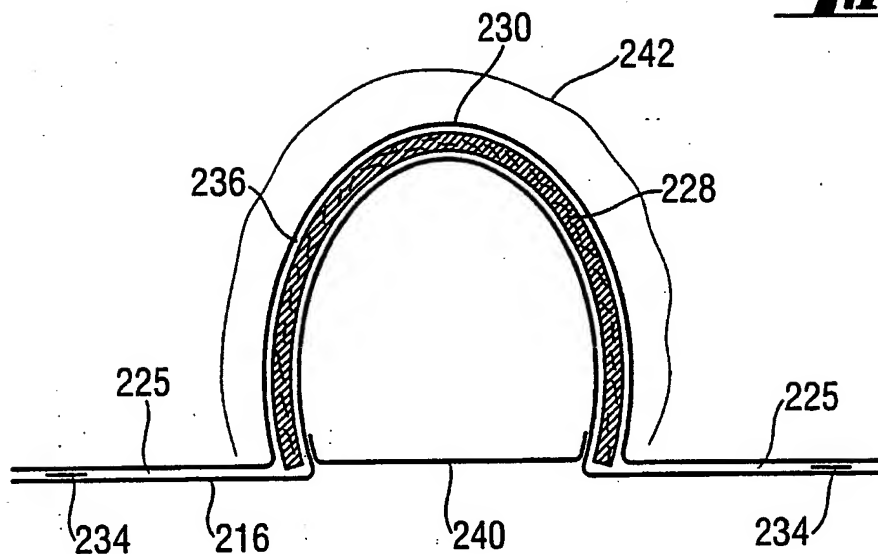


Fig. 2b

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/20792

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 064 431 A (JURGENSEN A.P.) 15 December 1936 see the whole document	1, 12, 13
Y	WO 93 01781 A (PROCTER & GAMBLE) 4 February 1993 see page 10, line 14 - page 11, line 4; figures 1, 4, 15 see page 19, line 10 - line 18 see page 57, line 33 - page 58, line 23	1, 12-14
Y	WO 96 41602 A (PROCTER & GAMBLE ; SAWAKI NORIKO (JP); DOKAN AKI (JP)) 27 December 1996 see abstract; figure 8	1, 12-14
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 July 1998

Date of mailing of the international search report

03/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mirza, A

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 97/20792

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 585 904 A (MCNEIL PPC INC) 9 March 1994 see column 2, line 51 - column 3, line 4; figures see column 5, line 12 - line 39 ---	1,5,22, 23
A	US 5 127 911 A (BAHARAV EVA) 7 July 1992 see abstract; figures ---	1,2,4-6
A	US 5 611 790 A (SUGAHARA KAZUKO ET AL) 18 March 1997 see column 60, line 32 - column 65, line 12; figures 62-69 -----	1,7-11, 20,21

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/20792

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2064431	A	15-12-1936	NONE	
WO 9301781	A	04-02-1993	US 5334176 A	02-08-1994
			AT 150958 T	15-04-1997
			AT 142467 T	15-09-1996
			AT 143247 T	15-10-1996
			AT 148831 T	15-02-1997
			AT 155032 T	15-07-1997
			AT 142468 T	15-09-1996
			AT 149823 T	15-03-1997
			AU 2348192 A	23-02-1993
			AU 663104 B	28-09-1995
			AU 2374292 A	23-02-1993
			AU 2383092 A	23-02-1993
			AU 2383192 A	23-02-1993
			AU 2399392 A	23-02-1993
			AU 662350 B	31-08-1995
			AU 2402592 A	23-02-1993
			AU 662757 B	14-09-1995
			AU 2420492 A	23-02-1993
			AU 2421392 A	23-02-1993
			AU 2507595 A	14-09-1995
			AU 2507695 A	14-09-1995
			AU 4021895 A	29-02-1996
			AU 4021995 A	29-02-1996
			AU 5844198 A	04-06-1998
			AU 6067196 A	03-10-1996
			BR 9205320 A	05-04-1994
			BR 9205329 A	05-10-1993
			BR 9205330 A	16-11-1993
			BR 9205346 A	16-11-1993
			BR 9206308 A	02-08-1994
			CA 2073849 A,C	24-01-1993
			CA 2092196 A	24-01-1993
			CA 2092197 A	24-01-1993
			CA 2092198 A	24-01-1993
			CA 2092199 A	24-01-1993
			CA 2092202 A	24-01-1993
			CA 2092203 A	24-01-1993
			CA 2092204 A,C	24-01-1993

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/20792

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9301781 A		CA 2113343 A,C CA 2195690 A CN 1071072 A CZ 9400129 A DE 69213694 D DE 69213694 T DE 69213701 D DE 69213701 T DE 69214120 D DE 69214120 T DE 69217469 D DE 69217469 T	24-01-1993 24-01-1993 21-04-1993 18-05-1994 17-10-1996 24-04-1997 17-10-1996 06-02-1997 31-10-1996 20-03-1997 27-03-1997 26-06-1997
WO 9641602 A	27-12-1996	JP 9000561 A AU 6384696 A EP 0836463 A	07-01-1997 09-01-1997 22-04-1998
EP 0585904 A	09-03-1994	AT 160499 T DE 69315396 D DE 69315396 T ES 2111109 T	15-12-1997 08-01-1998 18-06-1998 01-03-1998
US 5127911 A	07-07-1992	NONE	
US 5611790 A	18-03-1997	US 5334176 A CN 1082868 A MX 9300353 A NZ 244959 A US 5460622 A US 5486167 A US 5658269 A US 5702382 A US 5674212 A US 5683375 A AT 115390 T AU 645379 B AU 8929891 A CA 2093350 A,C CN 1063036 A,B DE 69105994 D	02-08-1994 02-03-1994 31-01-1994 24-03-1997 24-10-1995 23-01-1996 19-08-1997 30-12-1997 07-10-1997 04-11-1997 15-12-1994 13-01-1994 26-05-1992 30-04-1992 29-07-1992 26-01-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/20792

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5611790 A		DE 69105994 T	22-06-1995
		DK 555341 T	06-03-1995
		EP 0555341 A	18-08-1993
		ES 2065068 T	01-02-1995
		FI 931909 A	23-06-1993
		HK 90496 A	31-05-1996
		HU 67884 A	29-05-1995
		IE 65050 B	04-10-1995
		JP 6502336 T	17-03-1994
		MX 9101819 A	01-06-1992
		NO 301044 B	08-09-1997
		PL 167617 B	30-09-1995
		PT 8949 U	31-05-1994
		PT 99364 A	31-01-1994
		SK 41493 A	11-08-1993
		WO 9207535 A	14-05-1992
		US 5713884 A	03-02-1998
		US 5674214 A	07-10-1997
		US 5733274 A	31-03-1998
		US 5324278 A	28-06-1994
		AT 114960 T	15-12-1994
		AU 663052 B	28-09-1995
		AU 7973591 A	07-01-1992
		CA 2085006 A, C	19-12-1991
		DE 69105733 D	19-01-1995
		DE 69105733 T	27-04-1995
		DK 535047 T	06-03-1995
		EP 0535047 A	07-04-1993
		ES 2065043 T	01-02-1995
		MX 173334 B	16-02-1994
		WO 9119471 A	26-12-1991
		US H1376 H	01-11-1994
		AT 118336 T	15-03-1995
		AU 667297 B	21-03-1996